



国业光电
GUOYE OPTOELECTRONICS

**LED FLEXIBLE STRIP LIGHT
CATALOGUE**

Last Update : 2022.07.02

Contents :

2835 LED Strip Series	-----	002
5050 LED Strip Series	-----	006
2216 LED Strip Series	-----	007
3V 5V LED Strip Series	-----	008
CCT LED Strip Series	-----	011
RGB RGBW RGB+CCT Series	-----	012
High light efficiency Strip Series	-----	014
Waterproof LED Strip Series	-----	015
Pixel LED Strip - External IC Series	-----	017
Pixel LED Strip - Built-in IC Series	-----	019
Pixel LED Strip - Break point Series	-----	021
Pixel LED Strip - DMX512 Series	-----	025

Cooperation Partner :



2835 SMD LED Strip Series

Model 1 Picture

Recommend Star : ☆☆☆


4.8W/M


SPEC Parameters

Model :	GY-FS-2835-60D-8MM
Voltage :	DC12V / DC24V
LEDs :	2835 CRI>80
SMD :	60leds/M
Light Effect :	108LM/W
PCB width :	8 mm
Power :	4.8W / M
Color :	1500K-7000K all single color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features: Regular model, Low power, Price advantage, On stock offer , Fast delivery, Free samples

Model 2 Picture

Recommend Star : ☆☆☆☆

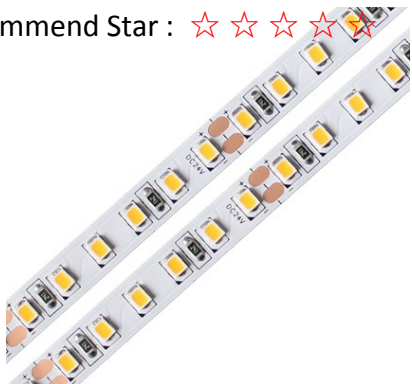

SPEC Parameters

Model :	GY-FS-2835-120D-8MM
Voltage :	DC12V / DC24V
LEDs :	2835 CRI>80
SMD :	120leds/M
Light Effect :	108LM/W
PCB width :	10 mm
Power :	9.6W / M
Color :	1500K-7000K all single color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features: 1, Very hot sales Model. Free samples. On stock offer. Fast delivery.
 2, Color option 1500k to 10000k,R,B,G,P,O,Y,UV,etc. CRI up to 95+, light efficiency up to 110LM/W.
 4, Make 2W-18W / meter, with different resistance
 5, Make with aluminum profiles, silicone cover to be rigid strip, led neon flex, etc.

Model 3 Picture

Recommend Star : ☆☆☆



SPEC Parameters


Model :	GY-FS-2835-120D-8MM
Voltage :	DC12V / DC24V
LEDs :	2835 CRI>80
SMD :	120leds/M
Light Effect :	108LM/W
PCB width :	10 mm
Power :	4.8W / M
Color :	1500K-7000K all single color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1,10mm width has the same specification as 8mm width
- 2,10mm wide FPCB, suitable for engineering applications,
- 3,10mm good for large size of aluminum or silicone cover to make rigid or neon flex.

Model 4 Picture

Recommend Star : ☆☆☆☆☆

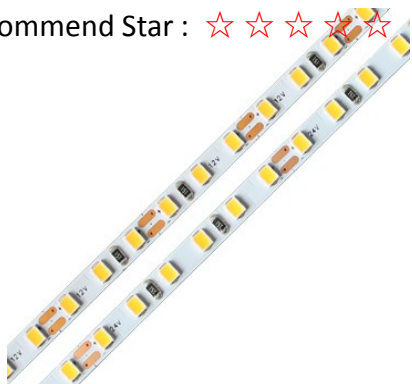

SPEC Parameters

Model :	GY-FS-2835-120D-8MM
Voltage :	DC12V / DC24V
LEDs :	2835 CRI>80
SMD :	120leds/M
Light Effect :	108LM/W
PCB width :	5 mm
Power :	9.6W / M
Color :	1500K-7000K all single color
IP Rank :	IP20
Pack :	5M 10M/Roll

Features: 1, Very hot sales Model. Free samples. On stock offer. Fast delivery.
 2, 8mm width has the same specification as 8mm width.
 3, Suitable for all kinds of small space installation and lighting, such as mirror side, acrylic side light, or small size aluminum, small size silicone neon lights, etc

Model 5 Picture

Recommend Star : ☆☆




SPEC Parameters

Model :	GY-FS-2835-180D-8MM
Voltage :	DC12V / DC24V
LEDs :	2835 CRI>80
SMD :	180leds/M
Light Effect :	108LM/W
PCB width :	8 mm
Power :	14.4W / M
Color :	1500K-7000K all single color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features: 1, 8mm width has the same specification as 8mm width.
 2, More led density design, No light spot, more light consistency when using PVC cover or silicone cover,

Model 6 Picture

Recommend Star : ☆☆☆☆☆

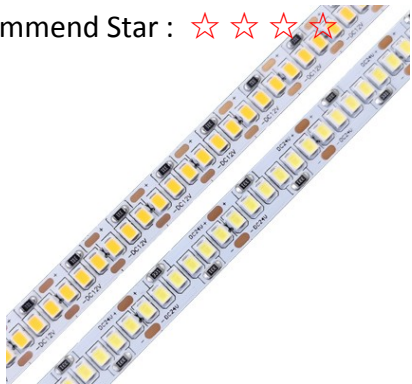

SPEC Parameters

Model :	GY-FS-2835-240D-10MM
Voltage :	DC12V / DC24V
LEDs :	2835 CRI>80
SMD :	240leds/M
Light Effect :	108LM/W
PCB width :	10 mm
Power :	9.6W / M
Color :	1500K-7000K all single color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:
 1, Hot sales Model. Free samples. On stock offer. Fast delivery.
 2, More led density design, No light spot or more light consistency when using PVC cover or silicone cover, customized for special customer requirements.

Model 7 Picture

Recommend Star : ☆ ☆


180leds/M

SPEC Parameters

Model :	GY-FS-2835-180D-5MM
Voltage :	DC12V / DC24V
LEDs :	2835 CRI>80
SMD :	180 leds/M
Light Effect :	100LM/W
PCB width :	5 mm
Power :	9.6W / M
Color :	1500K-7000K all single color
IP Rank :	IP20
Pack :	5M 10M/Roll

Features:

- 1, Special requirements products, not hot offer , can offer samples.
- 2, Suitable for all kinds of small space installation and lighting, such as mirror side, acrylic side light, etc

Model 8 Picture

Recommend Star : ☆ ☆ ☆


FPCB : 15MM

SPEC Parameters

Model :	GY-FS-2835-240D-15MM
Voltage :	DC24V
LEDs :	2835 CRI>80
SMD :	240 leds/M
Light Effect :	100LM/W
PCB width :	15 mm
Power :	20W / M
Color :	1500K-7000K all single color
IP Rank :	IP20 / IP67
Pack :	5M 10M/Roll

Features:

- 1, Double row light strip, high brightness style, customizable 20W-30W per meter.
- 2, Suitable for engineering lighting, with large size aluminum, large size silicone neon light use.

Model 9 Picture

Recommend Star : ☆ ☆ ☆


FPCB : 20MM

SPEC Parameters

Model :	GY-FS-2835-240D-20MM
Voltage :	DC24V
LEDs :	2835 CRI>80
SMD :	240 leds/M
Light Effect :	100LM/W
PCB width :	20 mm
Power :	20W / M
Color :	1500K-7000K all single color
IP Rank :	IP20 / IP67
Pack :	5M 10M/Roll

Features:

- 1, Hot sales Model. Free samples. On stock offer. Fast delivery.
- 2, Double row light strip, high brightness style, customizable 20W-30W per meter.
- 3, Suitable for engineering lighting, with large size aluminum, large size silicone neon light use.

Model 10 Picture

Recommend Star : ☆ ☆


SPEC Parameters

Model :	GY-FS-2835-480D-40MM
Voltage :	DC24V
LEDs :	2835 CRI>80
SMD :	480 leds/M
Light Effect :	100LM/W
PCB width :	40 mm
Power :	40W / M
Color :	1500K-7000K all single color
IP Rank :	IP20
Pack :	5M 10M/Roll

Features:

- 1, Special offer products, can offer samples.
- 2, Suitable for engineering lighting, with large size aluminum, large size silicone neon light use.

Model 11 Picture

Recommend Star : ☆ ☆ ☆ ☆ ☆


SPEC Parameters

Model :	GY-FS-2835-120D-8MM
Voltage :	DC12V / DC24V
LEDs :	2835 CRI>80
SMD :	120 leds/M
Light Effect :	---LM/W
PCB width :	8 mm
Power :	14W / M
Color :	RGB color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1, New arrival products, samples on stock, fast delivery.
- 2, Higher density LEDs, better light consistency, can make smaller RGB neon flex light.

Model 12 Picture

Recommend Star : ☆ ☆

Wait for update ...
SPEC Parameters

Model :	GY-FS-2835- D- MM
Voltage :	DC24V
LEDs :	2835 CRI>80
SMD :	---leds/M
Light Effect :	100LM/W
PCB width :	--- mm
Power :	---W / M
Color :	---color
IP Rank :	IP20 / IP67
Pack :	5M 10M/Roll

Features:

- 1,.
- 2,.
- 3,.

5050 SMD LED Strip Series

Model 13 Picture

Recommend Star : ☆☆☆


30LEDs/M

SPEC Parameters

Model :	GY-FS-5050-30D-10MM
Voltage :	DC12V / DC24V
LEDs :	5050 CRI>80
SMD :	30leds/M
Light Effect :	100LM/W
PCB width :	10 mm
Power :	4.8W / M
Color :	1500K-7000K RGB all color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features: Regular model, Low power, Price advantage, Fast delivery.

Model 14 Picture

Recommend Star : ☆☆☆☆



SPEC Parameters


Model :	GY-FS-5050-60D-10MM
Voltage :	DC12V / DC24V
LEDs :	5050 CRI>80
SMD :	60leds/M
Light Effect :	100LM/W
PCB width :	10 mm
Power :	14.4W / M
Color :	1500K-7000K all single color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1, Very hot sales Model. Free samples. On stock offer.
- 2, Stable and reliable, traditional led strip light style. Fast delivery.
- 3, Color option 1500k to 10000k,R,B,G,P,O,Y,UV,etc. CRI up to 95+, light efficiency up to 110LM/W.

Model 15 Picture

Recommend Star : ☆☆☆☆

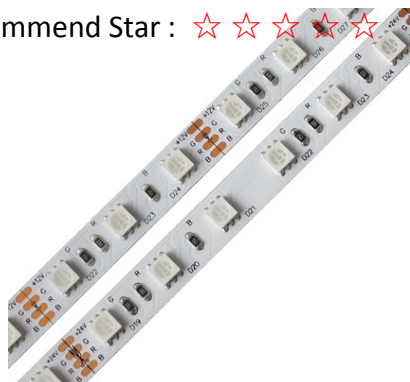

SPEC Parameters

Model :	GY-FS-5050-60D-10MM
Voltage :	DC12V / DC24V
LEDs :	5050 CRI>80
SMD :	60leds/M
Light Effect :	-- LM/W
PCB width :	10 mm
Power :	14.4W / M
Color :	RGB color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1, Very hot sales Model. Free samples. On stock offer.
- 2, Stable and reliable, traditional RGB color led strip light style. Fast delivery.

2216 SMD LED Strip Series

Model 16 Picture

Recommend Star : ☆ ☆


2216SMD

SPEC Parameters

Model :	GY-FS-2216-120D-10MM
Voltage :	DC24V
LEDs :	2216 CRI>90
SMD :	120leds/M
Light Effect :	110LM/W
PCB width :	10 mm
Power :	9.8W / M
Color :	2700K / 3000K / 4000K / 6000K
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features: Customized products, inventory materials, contact us for more specifications. Fast delivery.

Model 17 Picture

Recommend Star : ☆ ☆ ☆ ☆ ☆


140leds/M

SPEC Parameters

Model :	GY-FS-2216-140D-8MM
Voltage :	DC24V
LEDs :	2216 CRI>90
SMD :	140leds/M
Light Effect :	120LM/W
PCB width :	8 mm
Power :	10W / M
Color :	2700K / 3000K / 4000K / 6000K
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M 20M 50M/Roll

Features:

- 1, On stock offer. Fast delivery. Free samples.
- 2, Customized products, high light efficiency up to 120lm/ W, high display index >93.
- 3, Hot recommended products, contact us for more specifications.

Model 18 Picture

Recommend Star : ☆ ☆ ☆


FPCB: 3MM

SPEC Parameters

Model :	GY-FS-2216-120D-3MM
Voltage :	DC12V / DC24V
LEDs :	2216 CRI>90
SMD :	120leds/M
Light Effect :	100LM/W
PCB width :	3.0 mm
Power :	10W / M
Color :	2700K / 3000K / 4000K / 6000K
IP Rank :	IP20
Pack :	5M 10M/Roll

Features:

- 1, Customized products, super thin FPCB width, Suitable for all kinds of narrow space lighting.

Model 19 Picture

Recommend Star : ☆ ☆


2216SMD
SPEC Parameters

Model :	GY-FS-2216-156D-2.5MM
Voltage :	DC12V / DC24V
LEDs :	2216 CRI>90
SMD :	156leds/M
Light Effect :	110LM/W
PCB width :	2.5 mm
Power :	10W / M
Color :	2700K / 3000K / 4000K / 6000K
IP Rank :	IP20
Pack :	5M/Roll

Features: 1, Customized products, super thin FPCB width, Suitable for all kinds of narrow space lighting.

3V 5V LED Strip Series
Model 20 Picture

Recommend Star : ☆ ☆ ☆ ☆ ☆


60leds/M
SPEC Parameters

Model :	GY-FS-2835-60D-8MM
Voltage :	DC3V,3.7V, 5V
LEDs :	2835 CRI>80
SMD :	60leds/M
Light Effect :	100LM/W
PCB width :	8 mm
Power :	5W / M
Color :	1500K-7000K all single color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M 20M 50M/Roll

Features:

- 1, Very hot sales offer, On stock offer, Fast delivery, Free samples.
- 2, Support with USB,USB dimmer/switch, Battery box for gift box, small table lamp, decorative light, etc.

Model 21 Picture

Recommend Star : ☆ ☆ ☆


120leds/M
SPEC Parameters

Model :	GY-FS-2835-120D-8MM
Voltage :	DC3V,3.7V, 5V
LEDs :	2835 CRI>80
SMD :	120leds/M
Light Effect :	100LM/W
PCB width :	8 mm
Power :	10W / M
Color :	1500K-7000K all single color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M 20M 50M/Roll

Features:

- 1, Hot sales on stock offer, Fast delivery, Free samples.
- 2, Support with USB,USB dimmer/switch, Battery box for gift box, small table lamp, decorative light, etc.

Model 22 Picture

Recommend Star : ☆ ☆



SPEC Parameters

Model :	GY-FS-2835-120D-5MM
Voltage :	DC3V, 3.7V, 5V
LEDs :	2835 CRI>90
SMD :	120leds/M
Light Effect :	1010LM/W
PCB width :	5 mm
Power :	10W / M
Color :	1500K-7000K all single color
IP Rank :	IP20
Pack :	5M/Roll

Features:

1, Super thin FPCB width, Suitable for all kinds of narrow space lighting.

Model 23 Picture

Recommend Star : ☆ ☆ ☆ ☆



SPEC Parameters

Model :	GY-FS-2835-120D-8MM
Voltage :	DC3V,3.7V, 5V
LEDs :	2835 CRI>80
SMD :	120leds/M
Light Effect :	100LM/W
PCB width :	8 mm
Power :	10W / M
Color :	Double color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M 20M 50M/Roll

Features:

1, Many customers like this product, hot sales on stock offer, Fast delivery, Free samples.

2, Support with USB,USB dimmer/switch, Battery box for gift box, small table lamp, decorative light, etc.

Model 24 Picture

Recommend Star : ☆ ☆ ☆ ☆ ☆



SPEC Parameters

Model :	GY-FS-5050-30D-10MM
Voltage :	DC3V,3.7V, 5V
LEDs :	5050
SMD :	30leds/M
Light Effect :	--LM/W
PCB width :	10 mm
Power :	4.8W / M
Color :	RGB color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M 20M 50M/Roll

Features:

1, Hot sales on stock offer, Fast delivery, Free samples.

2, Support with USB,USB Controller, Battery box for gift box, TV background light, computer decorative light, etc.

Model 25 Picture

Recommend Star : ☆ ☆ ☆



SPEC Parameters

Model :	GY-FS-2835-60D-8MM
Voltage :	DC3V, 3.7V, 5V
LEDs :	2835 CRI>80
SMD :	60leds/M
Light Effect :	100LM/W
PCB width :	8 mm
Power :	5W / M
Color :	1500K-7000K all single color
IP Rank :	IP20 / IP65
Pack :	1M 2M/ Set

Features:

- 1, Hot sales custom products, On stock offer, Fast delivery, Free samples.
- 2, USB switch with 5V strip light , Customize length of switch wire, customize length of LED strip.
- 3, USB cable/dimmer/switch options, other 5V led strip light or different light color options

Model 26 Picture

Recommend Star : ☆ ☆ ☆



SPEC Parameters


Model :	GY-FS-2835-120D-8MM
Voltage :	DC3V,3.7V, 5V
LEDs :	2835 CRI>80
SMD :	120leds/M
Light Effect :	100LM/W
PCB width :	8 mm
Power :	10W / M
Color :	Double color
IP Rank :	IP20 / IP65
Pack :	1M 2M/ Set

Features:

- 1, Hot sales custom products, On stock offer, Fast delivery, Free samples.
- 2, Double color strip set has the same specification as single color

Model 27 Picture

Recommend Star : ☆ ☆ ☆

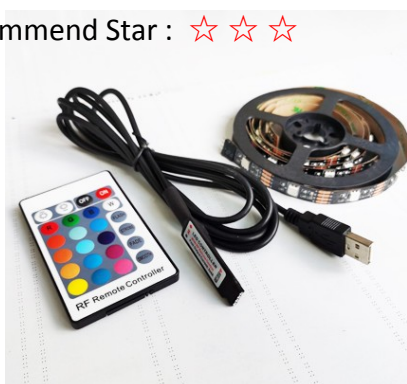

SPEC Parameters

Model :	GY-FS-5050-30D-10MM
Voltage :	DC3V,3.7V, 5V
LEDs :	5050
SMD :	30leds/M
Light Effect :	--LM/W
PCB width :	10 mm
Power :	4.8W / M
Color :	RGB color
IP Rank :	IP20 / IP65
Pack :	1M 2M/ Set

Features:

- 1, Hot sales custom products, On stock offer, Fast delivery, Free samples.
- 2, Support with USB Controller, for TV background light, computer decorative light, etc.

Model 28 Picture

Recommend Star : ☆☆☆


SPEC Parameters

Model :	GY-FS-2835-60D-8MM
Voltage :	DC3V, 3.7V, 5V
LEDs :	2835 CRI>80
SMD :	60leds/M
Light Effect :	100LM/W
PCB width :	8 mm
Power :	5W / M
Color :	1500K-7000K all single color
IP Rank :	IP20 / IP65
Pack :	1M 2M/ Set

Features:

- 1, Hot sales custom products, On stock offer, Fast delivery, Free samples.
- 2, Power by battery box, Customize type of led strip, customize length of LED strip.

CCT (double color) LED Strip Series
Model 29 Picture

Recommend Star : ☆☆☆☆


SPEC Parameters


Model :	GY-FS-2835-120D-8MM
Voltage :	DC12V / DC24V
LEDs :	2835 CRI>80
SMD :	120leds/M
Light Effect :	100LM/W
PCB width :	8 mm
Power :	10W / M
Color :	Double color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M / Roll

Features: 1, Hot sales custom products, On stock offer, Fast delivery, Free samples.

- 2, Can be any two color led to get different color effect, like 2700K+6000K, red + white, blue +3000K, etc
- 3, Control by dimmer to get different color, like 3000K+6000K to get warm, nature, pure white color .

Model 30 Picture

Recommend Star : ☆☆

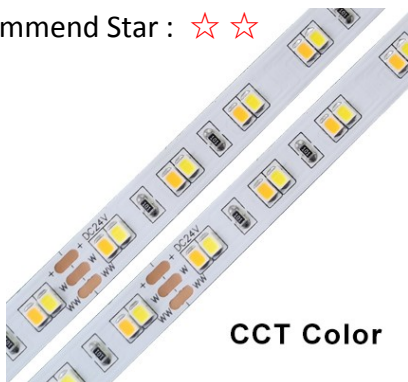
SPEC Parameters

Model :	GY-FS-2835-120D-10MM
Voltage :	DC12V / DC24V
LEDs :	2835 CRI>80
SMD :	120leds/M
Light Effect :	100LM/W
PCB width :	10 mm
Power :	10W / M
Color :	Double color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M / Roll

Features: 1, Can be any two color led, like 2700K+6000K, red + white, blue +3000K, etc

- 2, Control by dimmer to get different color, like 3000K+6000K to get warm, nature, pure white color .

Model 31 Picture



SPEC Parameters

Model :	GY-FS-2835-240D-8MM
Voltage :	DC24V
LEDs :	2835 CRI>80
SMD :	240leds/M
Light Effect :	100LM/W
PCB width :	8 mm
Power :	10W / M
Color :	Double color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M / Roll

Features:

- 1, Newly developed products, better mixing light effect, On stock offer, Fast delivery, Free samples.
- 2, Can be any two color led to get different color effect, like 2700K+6000K, red + white, blue +3000K, etc

RGB RGBW WRGBWW(RGB+CCT) LED Strip Series

Model 11 Picture




SPEC Parameters

Model :	GY-FS-2835-120D-8MM
Voltage :	DC12V / DC24V
LEDs :	2835 CRI>80
SMD :	120leds/M
Light Effect :	---LM/W
PCB width :	8 mm
Power :	14W / M
Color :	RGB color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features: 1, New arrival products, samples on stock, fast delivery.

2, Higher density LEDs, better light consistency, can make smaller RGB neon flex light.

Model 15 Picture

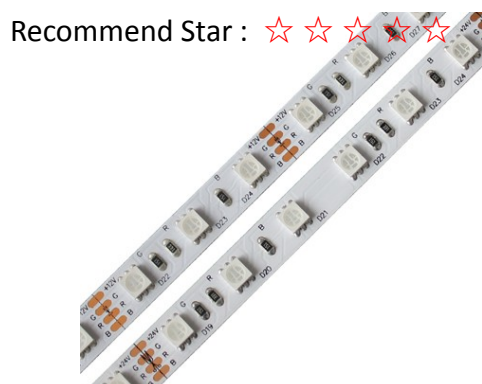

SPEC Parameters


Model :	GY-FS-5050-60D-10MM
Voltage :	DC12V / DC24V
LEDs :	5050 CRI>80
SMD :	60leds/M
Light Effect :	-- LM/W
PCB width :	10 mm
Power :	14.4W / M
Color :	RGB color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

1, Very hot sales Model. Free samples. On stock offer.

2, Stable and reliable, traditional RGB color led strip light style. Fast delivery.

Model 32 Picture

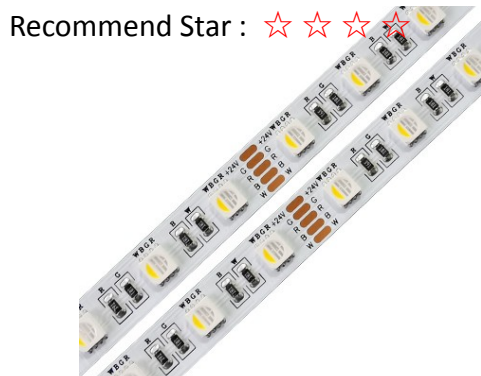


SPEC Parameters

Model :	GY-FS-5050-60D-10MM
Voltage :	DC12V / DC24V
LEDs :	5050 CRI>80
SMD :	60leds/M
Light Effect :	-- LM/W
PCB width :	10 mm
Power :	19.2W / M
Color :	RGBW(3000K/4000K/6000K)
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1, Hot sales Model. Samples on stock offer. Fast delivery.
- 2, 4 in 1 5050 SMD, white color can be warm 3000k,nature 4000k, pure white 6000k.
- 3, Control with 4 channel output controller, more rich color , more changing effect.

Model 33 Picture

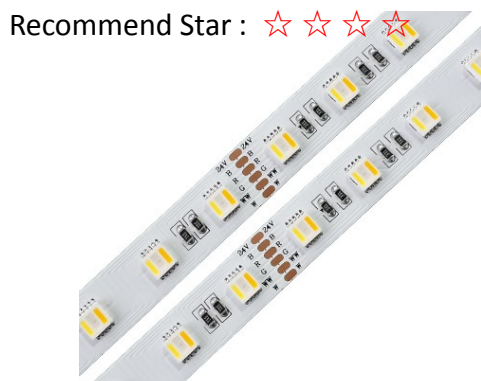

SPEC Parameters

Model :	GY-FS-5050-60D-10MM
Voltage :	DC12V / DC24V
LEDs :	5050 CRI>80
SMD :	60leds/M
Light Effect :	-- LM/W
PCB width :	12 mm
Power :	24.0W / M
Color :	WRGBWW
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1, Hot sales Model. Samples on stock offer. Fast delivery.
- 2, 5 in 1 5050 SMD, Built with warm 3000k, pure white 6000k in one 5050 led.
- 3, Control with 5 channel output controller, more rich color , more changing effect.

Model 34 Picture



SPEC Parameters

Model :	GY-FS-5050-60D-6MM
Voltage :	DC12V / DC24V
LEDs :	5050 CRI>80
SMD :	60leds/M
Light Effect :	-- LM/W
PCB width :	6 mm
Power :	14.4W / M
Color :	RGB color
IP Rank :	IP20
Pack :	5M 10M/Roll

Features:

- 1, Specially product, samples can be provided.
- 2, Stable and reliable, traditional RGB color , Suitable for small space RGB lighting.

High light efficiency LED Strip Series

Model 17 Picture




SPEC Parameters

Model :	GY-FS-2216-140D-8MM
Voltage :	DC24V
LEDs :	2216 CRI>90
SMD :	140leds/M
Light Effect :	120LM/W
PCB width :	8 mm
Power :	10W / M
Color :	2700K / 3000K / 4000K / 6000K
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M 20M 50M/Roll

Features:

- 1, On stock offer. Fast delivery. Free samples.
- 2, 2216 SMD led, high light efficiency up to 120lm/ W, high display index >93.
- 3, Using 7led with 2 resistors design circuit, well improve luminous efficiency, very popular.

Model 35 Picture

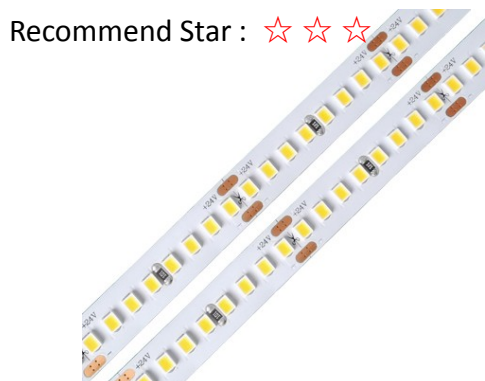


SPEC Parameters

Model :	GY-FS-2835-192D-10MM
Voltage :	DC24V
LEDs :	2835 CRI>80
SMD :	192leds/M
Light Effect :	165LM/W
PCB width :	10 mm
Power :	13W / M
Color :	3000K 4000K 6000K color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

- Features: 1, high light efficiency up to 165lm/ W, samples on stock, fast delivery.
 2, Using 8leds as a group design circuit, 0.5W 2835 SMD, up to 2000LM per meter.

Model 36 Picture

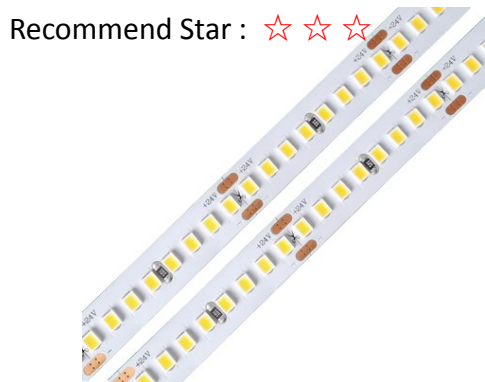

SPEC Parameters


Model :	GY-FS-2835-192D-10MM
Voltage :	DC24V
LEDs :	2835 CRI>80
SMD :	192leds/M
Light Effect :	220LM/W
PCB width :	10 mm
Power :	13W / M
Color :	3000K 4000K 6000K color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

- Features: 1, high light efficiency up to 220lm/ W, samples on stock, fast delivery.
 2, Using 8leds as a group design circuit, 1.0W 2835 SMD, up to 3000LM per meter.

Waterproof LED Strip Series

Model 37 Picture

Recommend Star : ☆☆☆☆

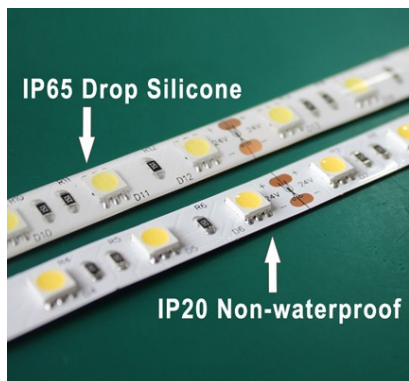

SPEC Parameters

IP20 : NON-Waterproof.



No any cover with circuit board and SMD led. Suitable for indoor, dry places, or places with aluminum cover, acrylic protection, etc.

IP65 : Drop Silicon glue or PU glue.



Cover with glue on circuit board and SMD led. Suitable for indoor, prevent from moisture, dust, etc.

- Features: 1, Usually offer 5m/roll, customized less than 5m. Cant make more than 5m in length.
2, Suitable for FPCB from 8mm to 12mm. IP65 please refer to various models .
3, Transparent silicon gel or PU glue will not affect the light output.
4, Glue will affect the color temperature and usually the color temperature will increase.

Model 38 Picture

Recommend Star : ☆☆☆☆

SPEC Parameters



IP67A : Cover with Silicone tube.

Put led strip into a highly transparent or milk silicone tube and seal it.
Suitable for indoor or outdoor lighting, prevent from dust, rain, moisture, rainwater for a short time.

- Features: 1, Usually offer 5m/roll, customized less than 10m. Cant make more than 10m in length.
1, Suitable for FPCB width from 5mm to 15mm, IP67 waterproof reference strip light parameters
2, High transparency, milky white, translucent silicone sleeves are available.
3, High transparent silica not big change on color temperature, milky white will reduce light efficiency.

Model 39 Picture



SPEC Parameters



IP68A : Silicon tube and Filled with silicon glue.


On the basis of IP67, fill with silicone glue into the tube. All cover of the led strip. Suitable for outdoor, ok to put under rain or put into underwater places.

Features: 1, Usually offer 5m/roll, customized less than 5m. Can not make more than 5m in length.
2, Suitable for FPCB from 8mm to 15mm. IP68 please refer to various models .
3, Silicon glue will affect the color temperature , usually the color temperature will increase.

Model 40 Picture



SPEC Parameters

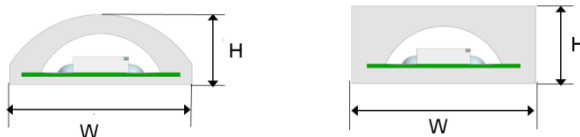


IP67B : Extrusion with half silicone.

Through the co-extrusion process, make led strip light covered with silica gel.


Suitable for indoor or outdoor lighting, prevent from dust, rain, moisture, rainwater for a short time.

Features: 1, Usually offer 5m/roll, can be 20m/50m roll, and other length.
2, Suitable for FPCB width 8mm/10mm/12mm/15mm, Silica will change on color temperature.

Model 41 Picture

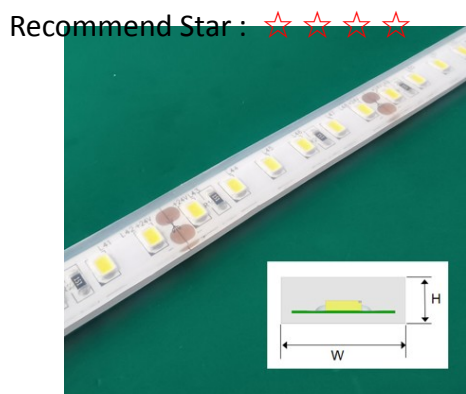

SPEC Parameters

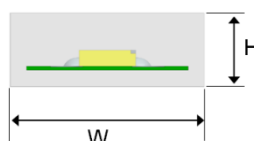

IP68B : Extrusion with Full Silicone.

Through the co-extrusion process, make led strip light covered with full silica gel.

Suitable for outdoor, ok to put under rain or put into underwater places.

Features:
1, Usually offer 5m/roll, can be 20m/50m roll, and other length.
2, Suitable for FPCB width 8mm/10mm/12mm/15mm, Silica will change on color temperature.

Pixel LED Strip - External IC Series

Model 42 Picture

Recommend Star : ☆☆☆



SPEC Parameters

Model :	GY-FS-5050-30D-WS2811-RGB
Voltage :	DC12V
LEDs :	5050 30leds/M
IC type :	WS2811 / SM16703
Pixel Points :	10 Pixel/M
PCB width :	10 mm
Power :	7.2W / M
Color :	Multi RGB color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1, Hot sales on stock offer. Fast delivery. Free samples.
- 2, Use high brightness 5050 RGB. Economic models, traditional, classical, stable of pixel led strip.

Model 43 Picture

Recommend Star : ☆☆☆☆



SPEC Parameters

Model :	GY-FS-5050-60D-WS2811-RGB
Voltage :	DC12V
LEDs :	5050 60leds/M
IC type :	WS2811 / SM16703
Pixel Points :	20 Pixel/M
PCB width :	10 mm
Power :	14.4W / M
Color :	Multi RGB color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1, Hot sales on stock offer. Fast delivery. Free samples.
- 2, Use high brightness 5050 RGB. Economic models, traditional, classical, stable of pixel led strip.

Model 44 Picture

Recommend Star : ☆☆☆☆



SPEC Parameters

Model :	GY-FS-5050-60D-WS2811-RGB
Voltage :	DC24V
LEDs :	5050 60leds/M
IC type :	WS2811 / SM16703
Pixel Points :	10 Pixel/M
PCB width :	10 mm
Power :	14.4W / M
Color :	Multi RGB color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1, Hot sales on stock offer. Fast delivery. Free samples.
- 2, Use high brightness 5050 RGB. Economic models, traditional, classical, stable of pixel led strip.

Model 45 Picture

Recommend Star : ☆ ☆ ☆ ☆



RGBW - TM1814/WS2814A/SM16704

SPEC Parameters

Model :	GY-FS-5050-60D-RGBW
Voltage :	DC12V
LEDs :	5050 60leds/M
IC type :	TM1814/WS2814A/SM16704
Pixel Points :	20 Pixel/M
PCB width :	10 mm
Power :	14.4W / M
Color :	Multi RGBW(3000K/4000K/6000K)
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1, Hot sales on stock offer. Fast delivery. Free samples.
- 2, Use high brightness 5050 RGBW. Economic models, traditional, classical, stable of pixel led strip.

Model 46 Picture

Recommend Star : ☆ ☆ ☆ ☆



RGBW - TM1814/WS2814A/SM16704

SPEC Parameters

Model :	GY-FS-5050-60D-RGBW
Voltage :	DC24V
LEDs :	5050 60leds/M
IC type :	TM1814/WS2814A/SM16704
Pixel Points :	10 Pixel/M
PCB width :	10 mm
Power :	14.4W / M
Color :	Multi RGBW(3000K/4000K/6000K)
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1, Hot sales on stock offer. Fast delivery. Free samples.
- 2, Use high brightness 5050 RGBW. Economic models, traditional, classical, stable of pixel led strip.

Model 47 Picture

Wait for update ...

SPEC Parameters

Model :	GY-FS-5050
Voltage :	DCV
LEDs :	5050 60leds/M
IC type :	
Pixel Points :	10 Pixel/M
PCB width :	10 mm
Power :	14.4W / M
Color :	RGB
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1,.
- 2,.

Pixel LED Strip - Built-in IC Series

Model 48 Picture

Recommend Star : ☆☆☆



SPEC Parameters

Model :	GY-FS-5050-30D-RGB
Voltage :	DC5V
LEDs :	5050 30leds/M
IC type :	SK6812 / WS2812B
Pixel Points :	30 Pixel/M
PCB width :	10 mm
Power :	7.2W / M
Color :	Multi RGB color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1, Hot sales on stock offer. Fast delivery. Free samples.
- 2, High brightness built-in IC 5050. Economic models, traditional, classical, stable of pixel led strip.

Model 49 Picture

Recommend Star : ☆☆☆☆



SPEC Parameters

Model :	GY-FS-5050-60D-RGB
Voltage :	DC5V
LEDs :	5050 60leds/M
IC type :	SK6812 / WS2812B
Pixel Points :	60 Pixel/M
PCB width :	10 mm
Power :	14.4W / M
Color :	Multi RGB color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1, Hot sales on stock offer. Fast delivery. Free samples.
- 2, Use high brightness 5050 RGB. Economic models, traditional, classical, stable of pixel led strip.

Model 50 Picture

Recommend Star : ☆☆☆



SPEC Parameters

Model :	GY-FS-5050-96D-RGB
Voltage :	DC5V
LEDs :	5050 96leds/M
IC type :	SK6812 / WS2812B
Pixel Points :	96 Pixel/M
PCB width :	10 mm
Power :	23W / M
Color :	Multi RGB color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1, Custom style, samples available.
- 2, Use high brightness 5050 RGB. Contact us for the latest product specifications .

Model 51 Picture

Recommend Star : ☆☆☆



SPEC Parameters

Model :	GY-FS-5050-144D-RGB
Voltage :	DC5V
LEDs :	5050 144leds/M
IC type :	SK6812 / WS2812B
Pixel Points :	144 Pixel/M
PCB width :	12 mm
Power :	34W / M
Color :	Multi RGB color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	1M 2M 5M/Roll

Features:

1, it is 5v voltage and designed to 144 lights per meter, better light color effect.

Model 52 Picture

Recommend Star : ☆☆☆



SPEC Parameters

Model :	GY-FS-5050-30D-RGBW
Voltage :	DC5V
LEDs :	5050 30leds/M
IC type :	SK6812
Pixel Points :	30 Pixel/M
PCB width :	10 mm
Power :	7.2W / M
Color :	Multi RGBW color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll


Features:

1, It is upgraded version of RGB . RGBW has more richer, more wonderful effect.

2, High brightness 5050 RGBW . White color can be warm 3000K, nature 4000K, pure 6000K color.

Model 53 Picture

Recommend Star : ☆☆☆

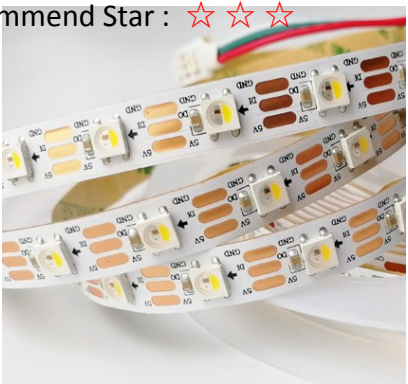

SPEC Parameters

Model :	GY-FS-5050-60D-RGBW
Voltage :	DC5V
LEDs :	5050 60leds/M
IC type :	SK6812
Pixel Points :	60 Pixel/M
PCB width :	10 mm
Power :	14.4W / M
Color :	Multi RGBW color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

1, It is upgraded version of RGB . RGBW has more richer, more wonderful effect.

2, High brightness 5050 RGBW . White color can be warm 3000K, nature 4000K, pure 6000K color.

Model 54 Picture

Recommend Star : ☆ ☆ ☆



SPEC Parameters


Model :	GY-FS-5050-144D-RGBW
Voltage :	DC5V
LEDs :	5050 144leds/M
IC type :	SK6812
Pixel Points :	144 Pixel/M
PCB width :	12 mm
Power :	34W / M
Color :	Multi RGBW color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	1M 2M 5M/Roll

Features:

- 1, It is upgraded version of RGB . RGBW has more richer, more wonderful effect.
- 2, High brightness 5050 RGBW . White color can be warm 3000K, nature 4000K, pure 6000K color.

Model 55 Picture

Recommend Star : ☆ ☆ ☆

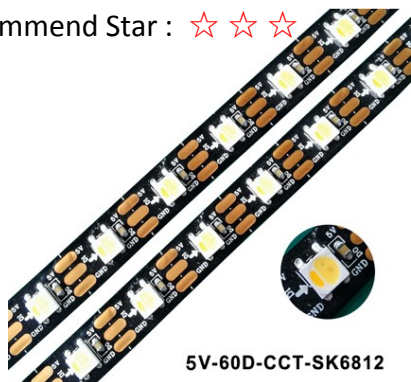

SPEC Parameters

Model :	GY-FS-5050-60D-CCT
Voltage :	DC5V
LEDs :	5050 60leds/M
IC type :	SK6812
Pixel Points :	60 Pixel/M
PCB width :	10 mm
Power :	14.4W / M
Color :	Multi CCT (double color)
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1, adjustable color temperature from 2000K to 6000K.
- 2, Toning and dim from warm to pure white and also can be dimmed for different changes effect.

Pixel LED Strip - Breakpoint Continue Series

Model 56 Picture

Recommend Star : ☆ ☆ ☆



SPEC Parameters


Model :	GY-FS-5050-30D-RGB
Voltage :	DC12V
LEDs :	5050 30leds/M
IC type :	TM1934 / WS2818
Pixel Points :	10 Pixel/M
PCB width :	10 mm
Power :	7.2W / M
Color :	Multi RGB color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1, Breakpoint Resume is an updated version of a single data channel LED strip.
- 2, Double signal channel, one led group damage, does not affect the overall lighting.

Model 57 Picture

Recommend Star : ☆ ☆ ☆

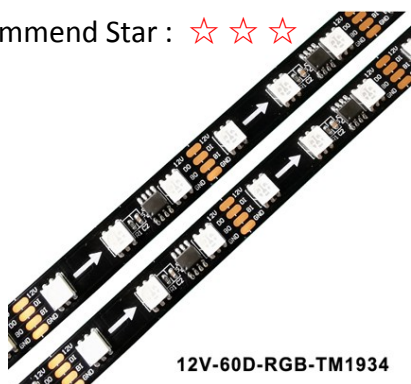

12V-60D-RGB-TM1934

SPEC Parameters

Model :	GY-FS-5050-60D-RGB
Voltage :	DC12V
LEDs :	5050 60leds/M
IC type :	TM1934 / WS2818
Pixel Points :	20 Pixel/M
PCB width :	10 mm
Power :	14.4W / M
Color :	Multi RGB color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1, Breakpoint Resume is an updated version of a single data channel LED strip.
- 2, Double signal channel, one led group damage, does not affect the overall lighting.

Model 58 Picture

Recommend Star : ☆ ☆ ☆



SPEC Parameters


Model :	GY-FS-5050-60D-RGB
Voltage :	DC24V
LEDs :	5050 60leds/M
IC type :	TM1934 / WS2818
Pixel Points :	10 Pixel/M
PCB width :	10 mm
Power :	14.4W / M
Color :	Multi RGB color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1, Breakpoint Resume is an updated version of a single data channel LED strip.
- 2, Double signal channel, one led group damage, does not affect the overall lighting.

Model 59 Picture

Recommend Star : ☆ ☆ ☆

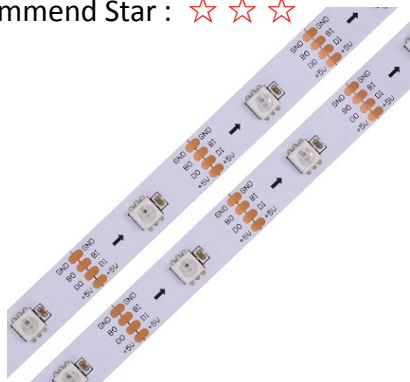

SPEC Parameters

Model :	GY-FS-5050-30D-RGB
Voltage :	DC5V
LEDs :	5050 30leds/M
IC type :	WS2813
Pixel Points :	30 Pixel/M
PCB width :	10 mm
Power :	7.2W / M
Color :	Multi RGB color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1, Breakpoint Resume is an updated version of a single data channel LED strip.
- 2, Double signal channel, one led group damage, does not affect the overall lighting.

Model 60 Picture

Recommend Star : ☆ ☆ ☆



SPEC Parameters

Model :	GY-FS-5050-60D-RGB
Voltage :	DC5V
LEDs :	5050 60leds/M
IC type :	WS2813
Pixel Points :	60 Pixel/M
PCB width :	10 mm
Power :	14.4W / M
Color :	Multi RGB color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1, Breakpoint Resume is an updated version of a single data channel LED strip.
- 2, Double signal channel, one led group damage, does not affect the overall lighting.

Model 61 Picture

Recommend Star : ☆ ☆ ☆



SPEC Parameters


Model :	GY-FS-5050-144D-RGB
Voltage :	DC5V
LEDs :	5050 144leds/M
IC type :	WS2813
Pixel Points :	144 Pixel/M
PCB width :	10 mm
Power :	24W / M
Color :	Multi RGB color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1, Breakpoint Resume is an updated version of a single data channel LED strip.
- 2, Double signal channel, one led group damage, does not affect the overall lighting.

Model 62 Picture

Recommend Star : ☆ ☆ ☆

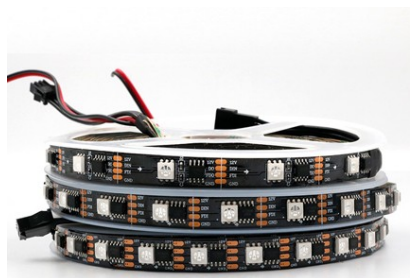

SPEC Parameters

Model :	GY-FS-5050-60D-RGB
Voltage :	DC12V
LEDs :	5050 60leds/M
IC type :	CS8208 / AT1606
Pixel Points :	60 Pixel/M
PCB width :	10 mm
Power :	14.4W / M
Color :	Multi RGB color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1, Breakpoint Resume is an updated version of a single data channel LED strip.
- 2, Double signal channel, one led group damage, does not affect the overall lighting.

Model 63 Picture

Recommend Star : ☆ ☆ ☆



12V-60D-RGB-SK6813

SPEC Parameters

Model :	GY-FS-5050-60D-RGB
Voltage :	DC12V
LEDs :	5050 60leds/M
IC type :	SK6813 / WS2815
Pixel Points :	60 Pixel/M
PCB width :	10 mm
Power :	14.4W / M
Color :	Multi RGB color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features: 1, Breakpoint Resume is an updated version of a single data channel LED strip.
 2, Double signal channel, one led group damage, does not affect the overall lighting.

Model 64 Picture

Recommend Star : ☆ ☆ ☆



SPEC Parameters

Model :	GY-FS-2835-112D-White
Voltage :	DC24V
LEDs :	2835 112leds/M
IC type :	TM1914 / WS2818
Pixel Points :	16 Pixel/M
PCB width :	10 mm
Power :	15W / M
Color :	Multi White color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features: 1, Breakpoint Resume is an updated version of a single data channel LED strip.
 2, Double signal channel, one led group damage, does not affect the overall lighting.

Model 65 Picture

Recommend Star : ☆ ☆ ☆

Model :	GY-FS-5050-60D-RGB
Voltage :	DC24V
LEDs :	5050 6leds/M
IC type :	UCS512C4
Pixel Points :	10 Pixel/M
PCB width :	12 mm
Power :	14.4W / M
Color :	Multi RGB color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

1, DMX512 led strip with suitable five-wire DMX512 international standard protocol.
 2, DMX512 RGB LED strips utilize direct DMX512 signals to control pixel by pixel.

Pixel LED Strip – DMX512 Series

Model 66 Picture

Recommend Star : ☆☆☆☆



SPEC Parameters

Model :	GY-FS-5050-60D-RGB
Voltage :	DC24V
LEDs :	5050 60leds/M
IC type :	UCS512C4
Pixel Points :	10 Pixel/M
PCB width :	12 mm
Power :	14.4W / M
Color :	Multi RGB color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1, DMX512 led strip with suitable five-wire DMX512 international standard protocol.
- 2, DMX512 RGB LED strips utilize direct DMX512 signals to control pixel by pixel.

Model 67 Picture

Recommend Star : ☆☆☆☆



SPEC Parameters

Model :	GY-FS-5050-30D-RGB
Voltage :	DC12V
LEDs :	5050 30leds/M
IC type :	DMX512
Pixel Points :	10 Pixel/M
PCB width :	10 mm
Power :	7.2W / M
Color :	Multi RGB color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

Features:

- 1, Use DMX controller to write code, can make the lamp strip change arbitrary effect.
- 2, Addressable, programmable digital led strip light with breakpoint continuation function.

Model 68 Picture

Recommend Star : ☆☆☆☆



SPEC Parameters

Model :	GY-FS-5050-60D-RGBW
Voltage :	DC24V
LEDs :	5050 60leds/M
IC type :	DMX512 / TM512AC
Pixel Points :	10 Pixel/M
PCB width :	10 mm
Power :	19.2W / M
Color :	Multi RGBW color
IP Rank :	IP20 / IP65 / IP67 / IP68
Pack :	5M 10M/Roll

- #### Features:
- 1, DMX512 led strip with suitable five-wire DMX512 international standard protocol.
 - 2, DMX512 RGB LED strips utilize direct DMX512 signals to control pixel by pixel.